FIG. 1

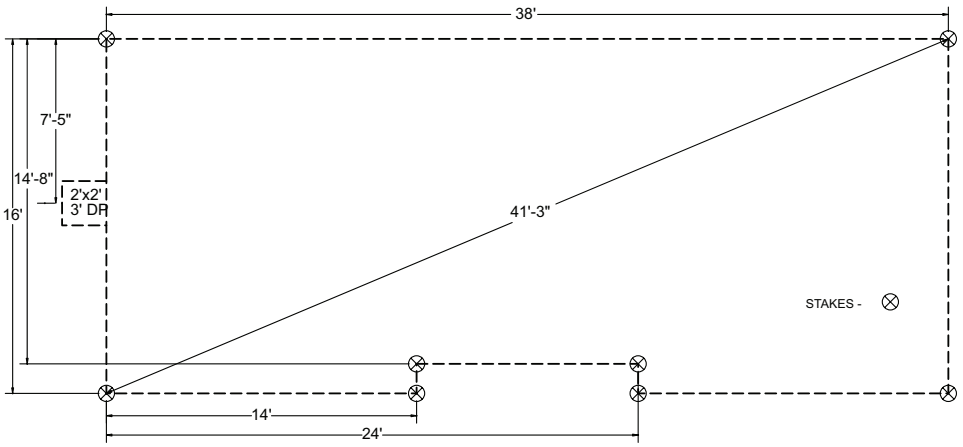

FIG. 3

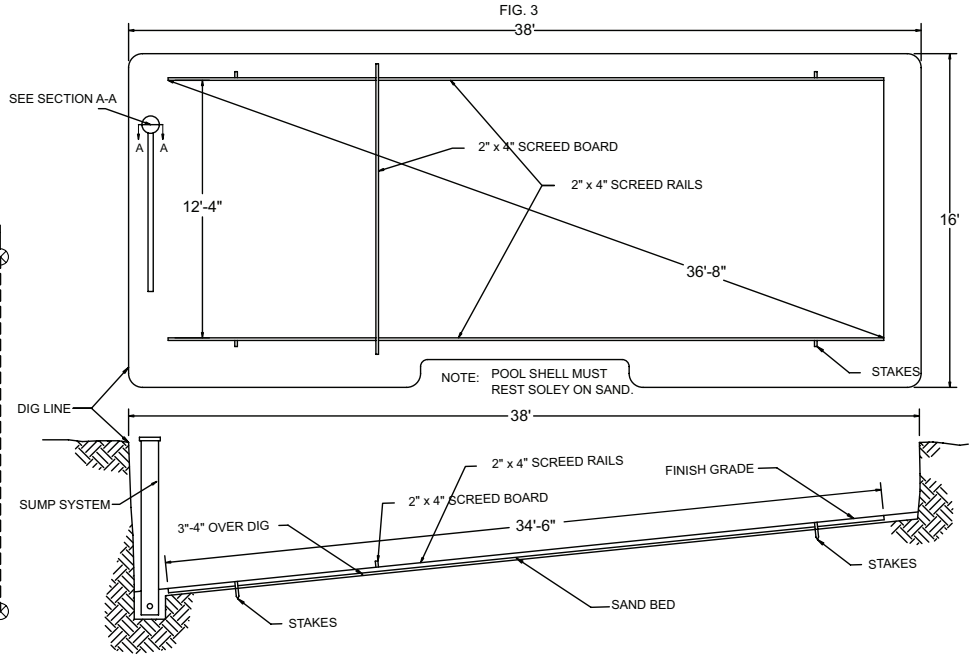

FIG. 2

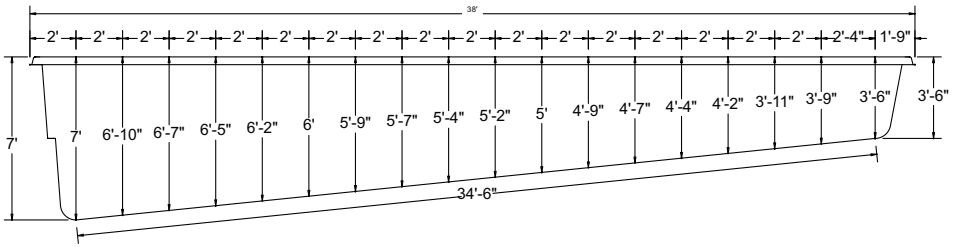

FORM 1
INSTALLATION PLANNING GUIDE

Job: Pool: Hydrus Date:

Finish Grade	
* Slope	-
Top of Concrete at Pool	=
Thickness of Concrete	- 3.5"
Top of Pool	=
Shallow End Depth	+ 42" or 3'-6"
Top of Sand Shallow End	=
Thickness of Sand	+ 3.5"
Top of Dig Shallow End	=
Top of Pool	
Deep End Depth	+ 84" or 7'-0"
Top of Sand Deep End	=
Thickness of Sand	+ 3.5"
Top of Dig Deep End	=

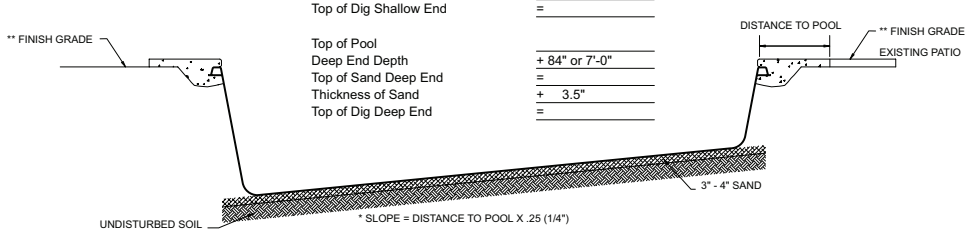

* SLOPE = DISTANCE TO POOL X .25 (1/4")

** IF POOL IS INDEPENDENT OF ANY EXISTING STRUCTURES OR PATIOS, FINISH GRADE IS TO BE 3 1/2" BELOW EDGE OF POOL DECK.

POOL NAME	SIZE (WIDTH x LENGTH)	DEPTHS (SHALLOW, DEEP)	GALLONS APPROX.	SQUARE FEET	PERIMETER FEET	LINEAR FEET (STEPS)	LINEAR FEET (SEATS)	WEIGHT
Hydrus	16' x 38'	3'-6" x 7'	19,000	541	106	21	24	2,700